


Immersed Floating

Oil skimmer

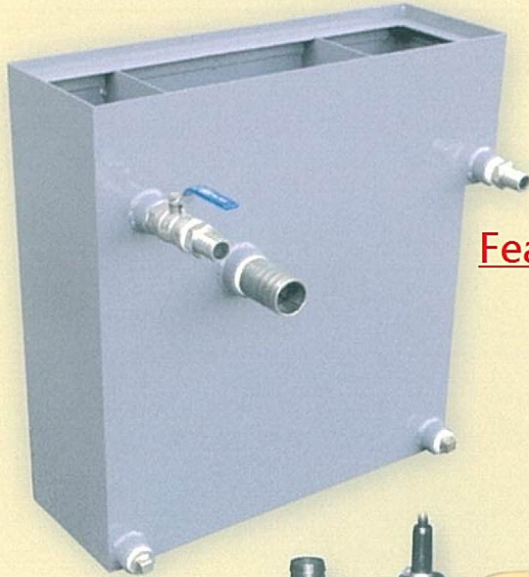

OIL、SLUDGE


To expel at the same time

Application:

1. Coolant Tank
2. Washing machine
3. Drainage channels
4. Sludge sedimentation tank
5. To recover the leaking oil


Feature:

1. According to the floatage of inlet pontoon and to track the level changing automatically.
2. Floating oil and floating sludge were sucked by high flow pump. The coolant has no oil and it does not smell foul and corrupt.
3. The oil, sludge and coolant were isolated by oil/water separator and it is easy clean: the coolant flow into the cistern, the oil be discharged.
4. Traditional oil skimmer of disc type or steel belt type is suitable for clean floating oil."OSS or OSF" are best choice for foul sludge.

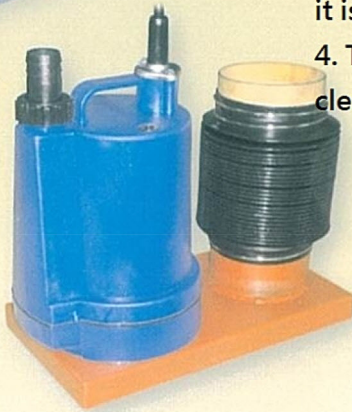


Pump: 110V,1/6HP, Flow rate:80L/min, Inlet:90mm
Oil/water separator: 600*400*600=100L
Adjusted bolts M12 were enclosed.

※ Immersed oil skimmer
OSS - LAYOUT

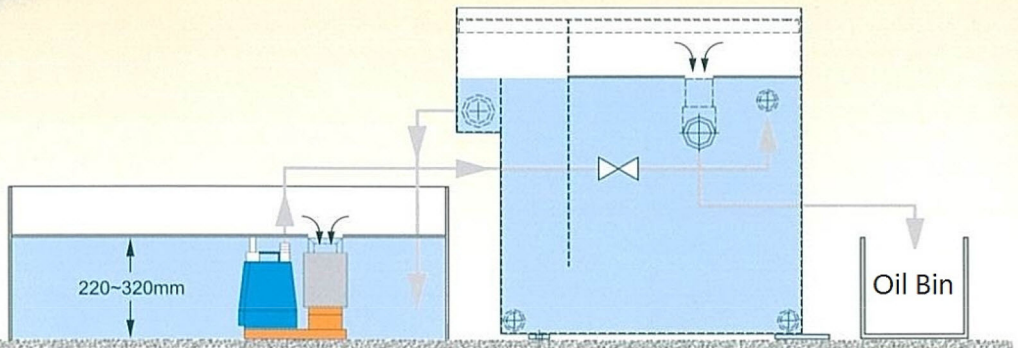

※ Floating oil skimmer
OSF LAYOUT

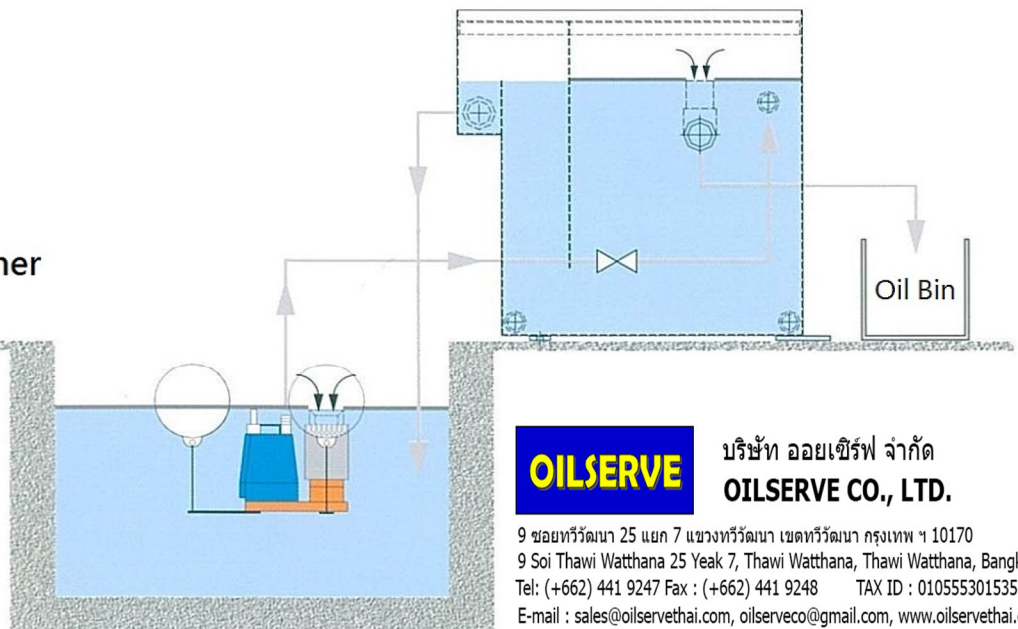

OILSERVE

บริษัท ออยเซอร์ฟ จำกัด
OILSERVE CO., LTD.

9 ซอยทวีวัฒนา 25 แยก 7 แขวงทวีวัฒนา เขตทวีวัฒนา กรุงเทพฯ 10170
9 Soi Thawi Watthana 25 Yeak 7, Thawi Watthana, Thawi Watthana, Bangkok 10170
Tel: (+662) 441 9247 Fax: (+662) 441 9248 TAX ID: 0105553015358
E-mail: sales@oilservevethai.com, oilserveco@gmail.com, www.oilservevethai.com