

LARGE MAGNETIC SEPARATOR





MCL-1500



MCA-500

APPLICATION:

Designed for central system and hot rolling system that needs very large flow rate. It is able to attract chips and particles from coolant, squeeze them dry, and then discharge out. Coolant becomes reusable and it is more eco-friendly.

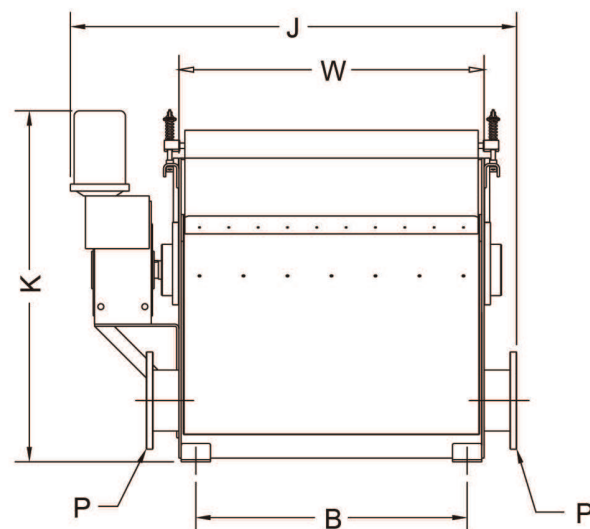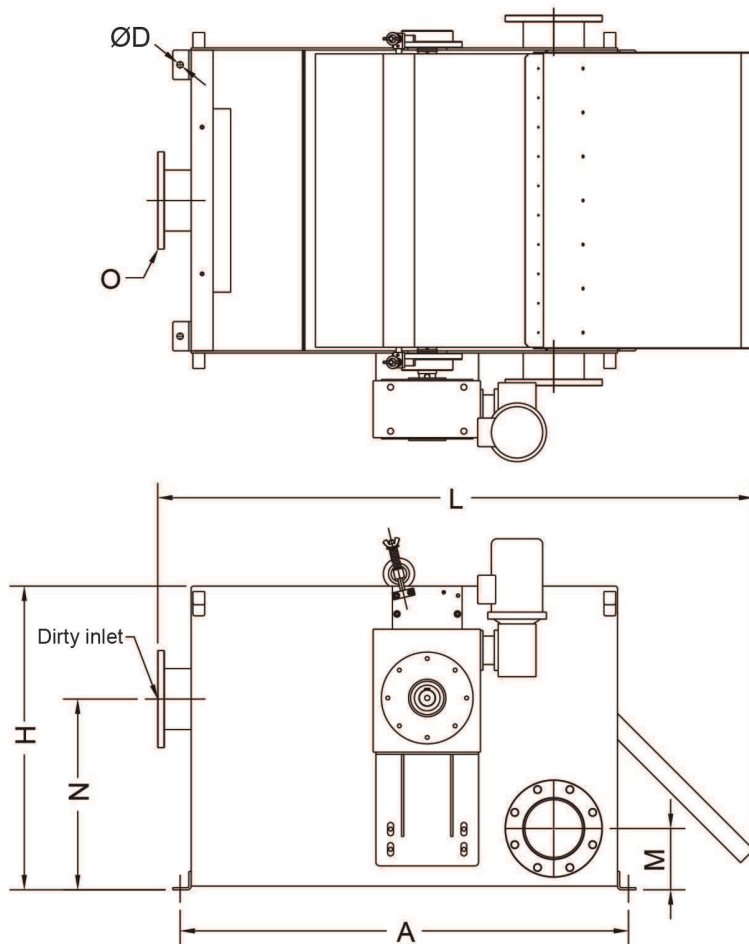

SPECIFICATIONS OF LARGE MAGNETIC SEPARATOR

Model	FLOW RATE L/MIN	L	W	H	M	N	A	B	D	J	K	INLET O	OUTLET P	MOTOR
MCA-240	240	820	420	305	70	200	660	340	17	585	480	PF 3"	PF 3"	100W
MCA-360	360	820	620	305	80	200	660	540	17	785	480	PF 4"	PF 4"	100W
MCA-500	500	820	820	305	90	200	660	740	17	985	480	PF 5"	PF 5"	100W
MCA-800	800	820	1220	305	90	200	660	1140	17	1385	480	PF 5"	PF 5"	200W
MCA-1000	1000	970	1520	405	110	285	810	1440	17	1685	580	PF 6"	PF 6"	200W
MCL-1000	1000	1625	820	828	167	520	1223	740	17	1217	957	6" 5K	6" 5K	1HP
MCL-1500	1500	1625	1220	828	167	520	1223	1140	17	1617	957	6" 5K	6" 5K	1HP
MCL-2000	2000	1625	1520	828	194	520	1223	1440	17	1917	957	8" 5K	8" 5K	1HP
MCL-3000	3000	2008	2420	918	237	610	1553	2340	17	2837	1047	10" 5K	10" 5K	1HP
MCL-4000	4000	2008	3220	918	237	610	1553	3140	17	3637	1047	12" 5K	12" 5K	1HP
MCL-5000	5000	2008	4020	978	270	670	1569	3940	17	4437	1107	14" 5K	14" 5K	1HP
MCL-6000	6000	2008	4820	978	270	670	1569	4740	17	5237	1107	14" 5K	14" 5K	1HP

Notes

1. For oil coolant, it is 25% to 50% from the mention capacity. (The higher viscosity the lower flow rate.)
2. We also provide 10 times rare earth magnets as an option.

240115-2000



UNI MAGNETIC INDUSTRIAL CO., LTD.

23, Gongye West 6th Rd, Lukang Town,
Chang hua Hsien, Taiwan R. O. C

OILSERVE

บริษัท ออยเซิร์ฟ จำกัด
OILSERVE CO., LTD.

9 ซอยทวีวัฒนา 25 แขวงทวีวัฒนา เขตทวีวัฒนา กรุงเทพฯ 10170
9 Soi Thawi Watthana 25 Yeak 7, Thawi Watthana, Thawi Watthana, Bangkok 10170
Tel: (+662) 441 9247 Fax: (+662) 441 9248 TAX ID: 010553015358
E-mail: sales@oilserve-thai.com, oilserveco@gmail.com, www.oilserve-thai.com