



Centrifugal Oil Cleaning System

Oilmax

Improve Product Quality, Reduce Oil Expenses



Use your *Oilmax*imum

Save cost on Tools & Dies, Filters & Oil replacement

- ◆ **No Filter Element**
- ◆ **No Replacement Cost**
- ◆ **Improved Product Finish**
- ◆ **Reduced Oil Consumption**
- ◆ **Extended Oil Change Period**
- ◆ **Reduced Machine downtime**
- ◆ **Reduced Storage & Disposal Cost of Waste Oil**
- ◆ **Reduced Pollution and Environmental Impact**



**Use *Oilmax*
Save Environment**

One Time Installation, Lifelong Savings

Applications


- ▶ Wire Drawing
- ▶ Cold Forming
- ▶ Fastener Mfg.
- ▶ Heat Treatment
- ▶ Bright Bar Mfg
- ▶ Thread Rolling
- ▶ Super Finishing
- ▶ Honing
- ▶ Grinding
- ▶ Gear Boxes
- ▶ Cement Mills
- ▶ Coal Mills
- ▶ Crushers
- ▶ Transmissions
- ▶ Marine Engines
- ▶ Port Equipments
- ▶ Mining Equipments
- ▶ DG Sets
- ▶ Cutting Oil
- ▶ EDM Oil
- ▶ Spindle Oil
- ▶ Hydraulic Oil
- ▶ Gear Oil
- ▶ Turbine Oil
- ▶ Engine Oil
- ▶ Furnace Oil
- ▶ Thermic Fluid
- ▶ Transmission Oil
- ▶ Compressor Oil
- ▶ Bio Diesel / WVO
- ▶ Anti Rust Oil
- ▶ Stamping Oil
- ▶ Honing Oil
- ▶ Quenching Oil
- ▶ Water Emulsions
- ▶ Test Bed Oil

Why Centrifugal Oil Cleaner

Centrifugal Oil Cleaner removes very fine dirt from Oil upto 1μ and below, by Centrifugal force created in centrifuge rotor. Conventional filters can not remove such fine dirt from oil. There are no consumables hence no recurring cost. Collected dirt can be easily cleaned and the unit put back to use again. With clean oil, wear of tools and dies is reduced and job finish is improved. The oil need not be replaced frequently, thereby saving substantially on oil expenses and protecting Environment.

Working Principle

Centrifugal Oil Cleaner works on reaction turbine principle. Oil enters Centrifuge under pressure and escapes through tangentially opposite nozzles of rotor producing rotor speed upto 8000 RPM. The resultant Centrifugal force removes dirt from the oil, depositing it on the inner wall of rotor in a dense cake form. Clean oil drains back to the oil tank by gravity.

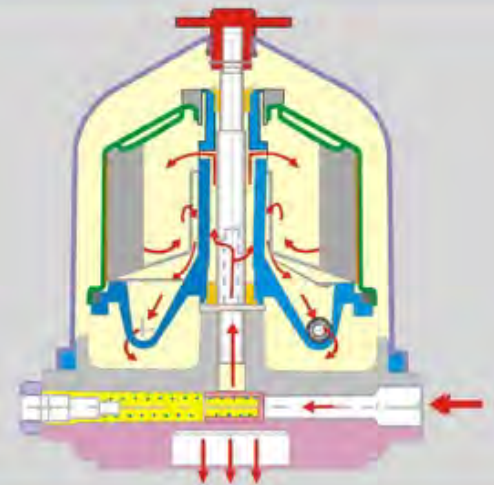


Schematic Diagram


Gravity Drain



Pressurised Delivery

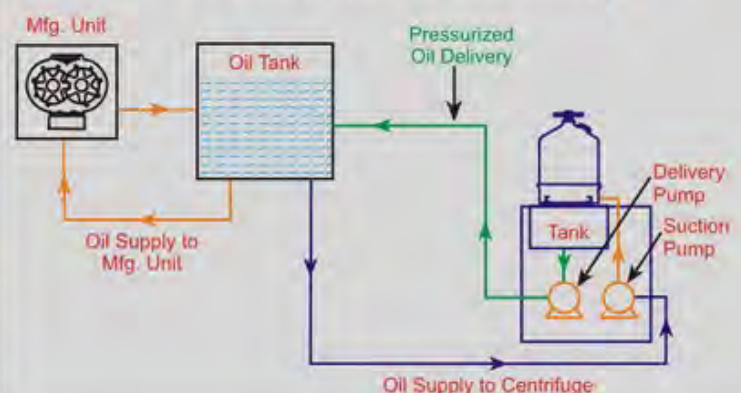

Construction

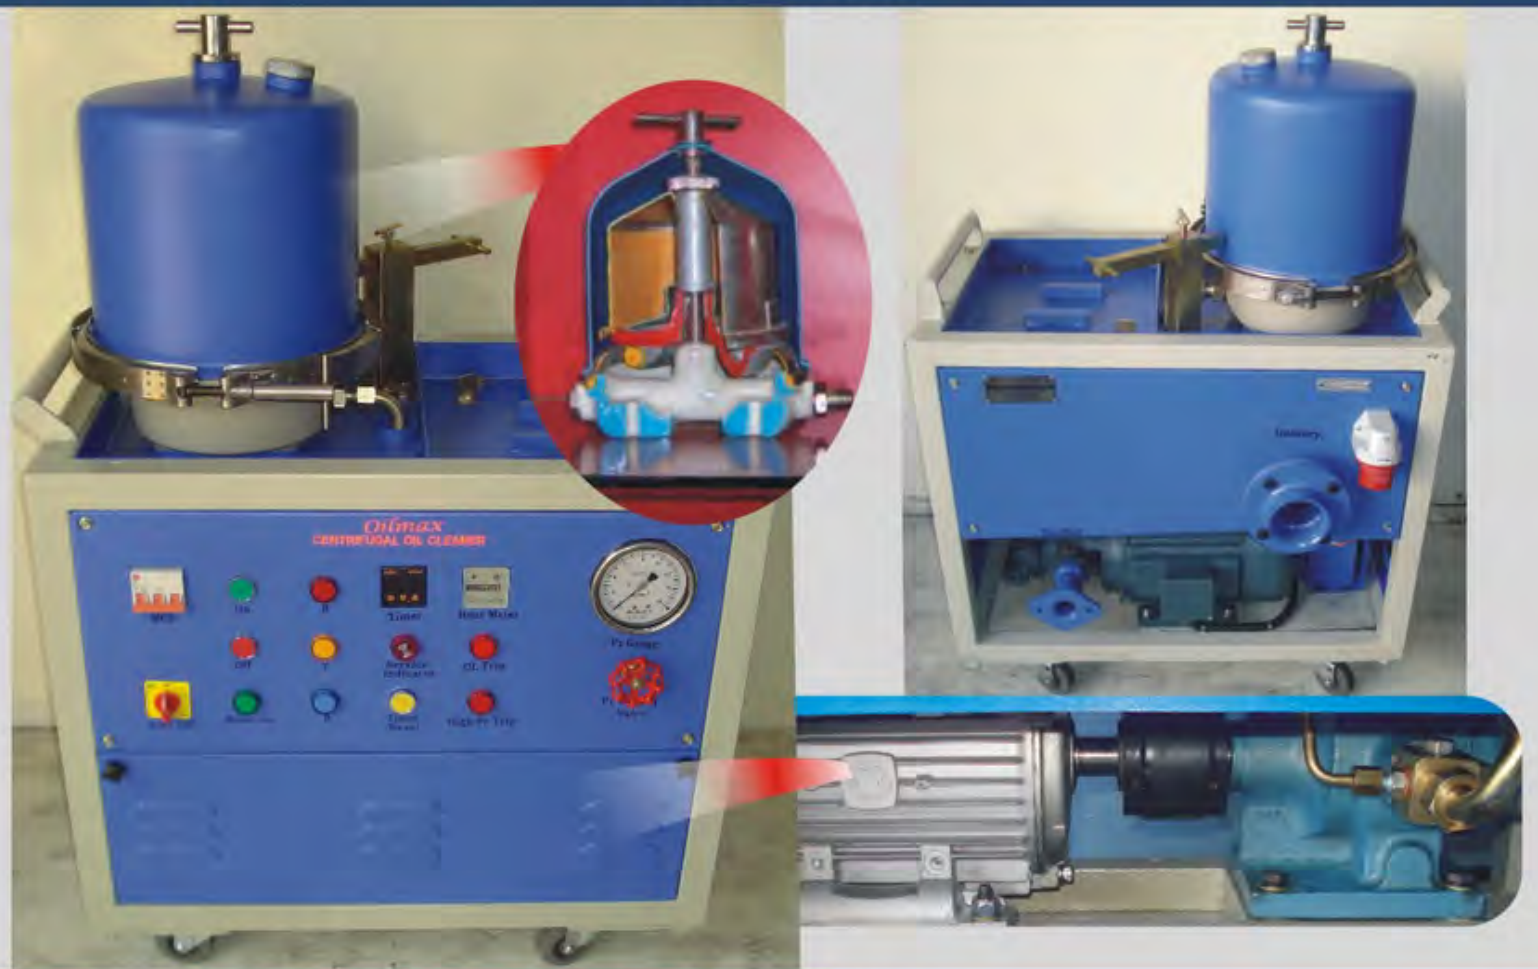

Product Range



Oil Cleaning System Model	Nominal Flow Rate	Dirt Holding Capacity	Dimension (W x D x H) Inch
OCS 500	500 LPH	500 cc	22 x 12 x 30
OCS 750	750 LPH	1000 cc	22 x 12 x 33
OCS 1500	1500 LPH	2000 cc	24 x 13 x 38
OCS 4000	4000 LPH	6000 cc	30 x 18 x 44
OCS 8000	8000 LPH	12000 cc	33 x 28 x 44
OCS 1000P	1000 LPH	1000 cc	28 x 18 x 36
OCS 1500P	1500 LPH	2000 cc	30 x 20 x 38
OCS 4000P	4000 LPH	6000 cc	33 x 23 x 44

Customers



Installations



Quenching

Bolt Forming


Furnace Oil

Copper Wire Drawing

Aluminium Wire Drawing

Cement Plant

Sludge Collected

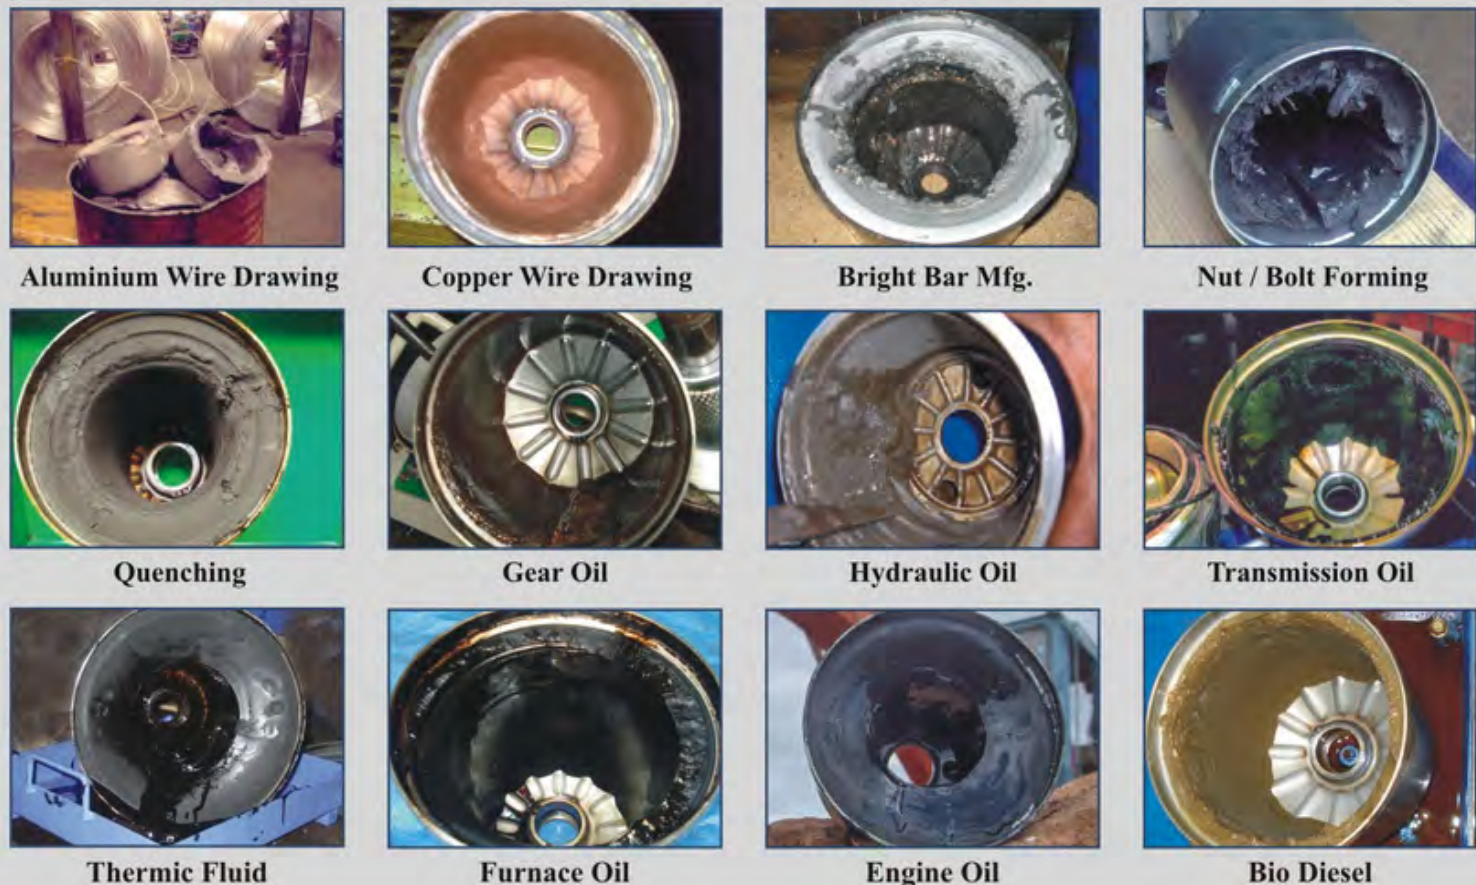

Aluminium Wire Drawing

Copper Wire Drawing

Bright Bar Mfg.

Nut / Bolt Forming

Quenching

Gear Oil

Hydraulic Oil

Transmission Oil

Thermic Fluid

Furnace Oil

Engine Oil

Bio Diesel

OILSERVE

บริษัท ออยเซอร์ฟ จำกัด
OILSERVE CO., LTD.

9 ซอยทวีวัฒนา 25 แยก 7 แขวงทวีวัฒนา เขตทวีวัฒนา กรุงเทพฯ 10170
9 Soi Thawi Watthana 25 Yeak 7, Thawi Watthana, Thawi Watthana, Bangkok 10170
Tel: (+662) 441 9247 Fax: (+662) 441 9248 TAX ID: 0105553015358
E-mail: sales@oilserve-thai.com, oilserveco@gmail.com, www.oilserve-thai.com

