



Coolant Purification Systems

ULTRA series

Economical type

Ultra-90




Standard type

Ultra-360



Central System type

Ultra-1200

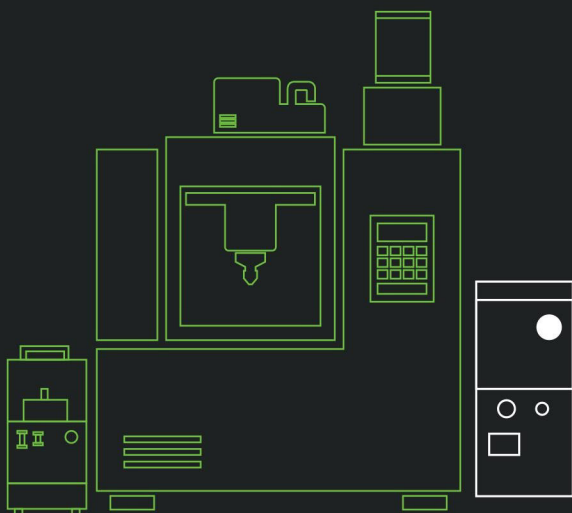



Features


- No electricity consumption
- No consumables
- Continuous purified operation
- Will not affect the viscosity of the coolant
- No adjustment required on the supplied float assembly inlet
- Patented design S.T.P.M module

Benefits

- Extends the coolant life up to 500%
- Save cost of changing coolant 25%
- Extends the tool life up to 20%
- Eliminates machine down time costs up to 15%

S.T.P.M

The S.T.P.M. module is composed of a nonlipophilic substance. It is made from a proprietary injected molded polymer. Each module consists of multiple filter screens overlapped in a unique design.





FLOATING SKIMMER

Patented design no adjustment required on the supplied floating assembly inlet. Patented Tubes are self-balanced



Example of a successful field



Specifications

All features, benefits and specifications are subject to change without notice.

Model	Ultra - 90	Ultra - 360	Ultra - 1200	Unit
Dimension	470 × 310 × 430	500 × 218 × 715	710 × 430 × 880	mm
Max coolant flow volume	90	360	1200	L / h
Max coolant process volume	10	14	70	L
Net weight	25/55	28/61	98/216	Kg / lb
Internal oil recycle reservoir	X	2	4.5	L
Filter indicator	X	V	V	
Incoming air pressure	2.5 / 35		3 / 50	Kg / psi