

Magnetic Chips Conveyor

磁性搬運機

● Usage

To install between machine and oil tank.

Through the permanent magnet rotating inside the conveyor, the chips (under 60mm) flowed in will be conveyed, raised, took off the oil and fell into the sludge box.

● 用途

安裝於工具機與切削油桶間，由內部轉動的永久磁鐵將流入長度60mm以下的切屑吸住，輸送、揚高、脫油、而掉入鐵屑收集桶。


● 使用實例

● 適用機械

1. 滾齒機
2. 拉床
3. 專用機
4. 銑床
5. 車床
6. 鑽床
7. 沖床

Applicable:

1. Hobbing machine
2. Broaching
3. Special purpose machine
4. Milling machine
5. Lathe
6. Drilling machine
7. Punching machine

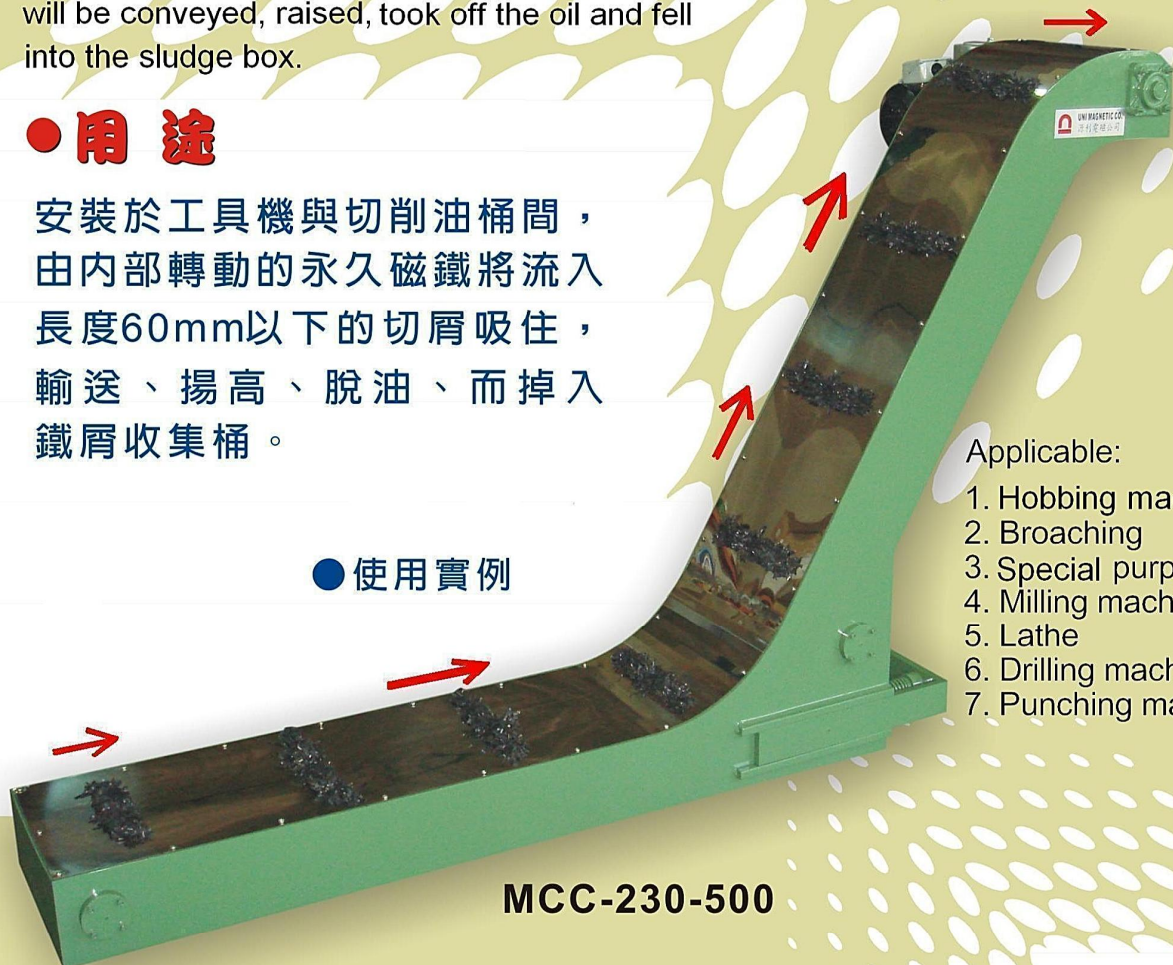


MCC-230-500

● 特點 FEATURES

1. 兼可水平輸送及斜度輸送兩種功能。
2. 磁鐵只在內部轉動，外部無活動零件密封性佳，安全可靠可直接放於油箱內。
1. This machine contains horizontal and gradient conveyed functions.
2. The magnet just rotates inside of conveyor. There is no movable parts outside. To provide optimum sealing performance and you could put this machine into the oil tank.



外型尺寸圖 DIMENSION

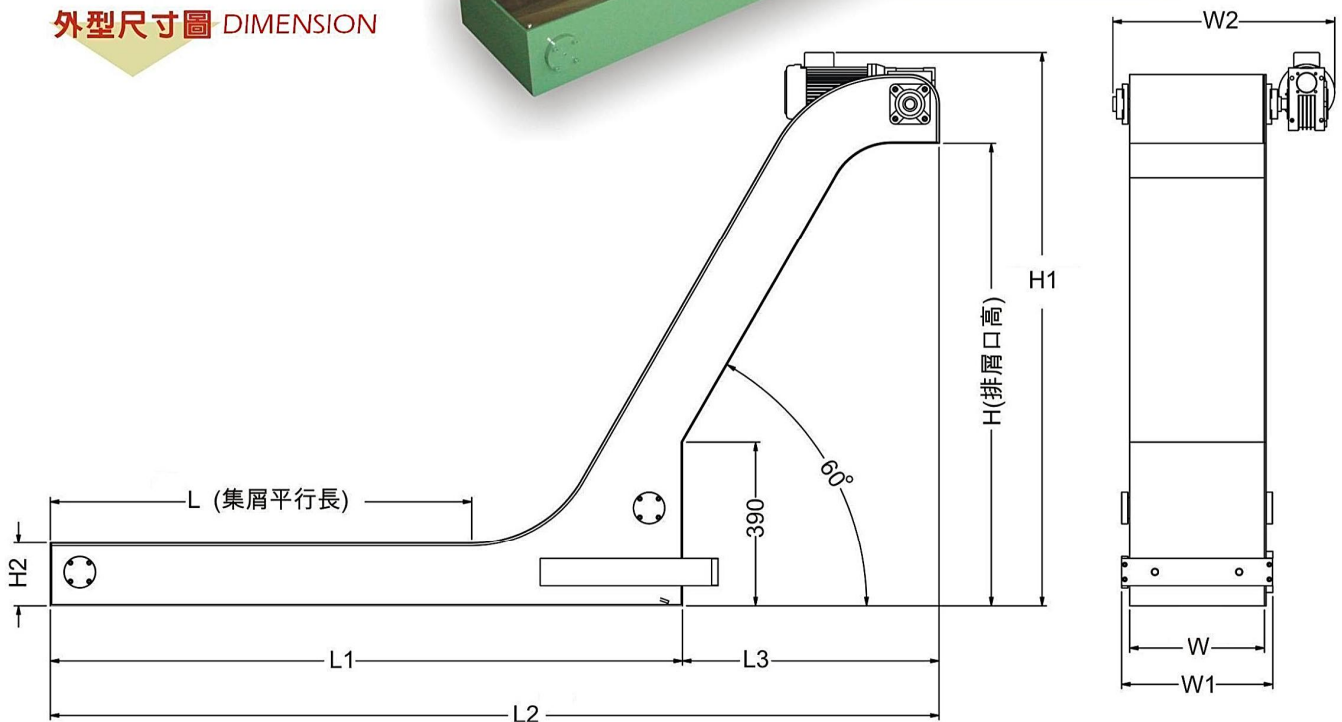

SPECIFICATION 磁性搬運機規格尺寸表

Model	Handle Weight kg/H	Velocity M/min	Motor	Reducer Ratio	L	L1	L2	L3	H	H1	H2	W	W1	W2
型 式	搬運量	搬運速度	馬達	比速	L	L1	L2	L3	H	H1	H2	W	W1	W2
MCC-230	20 kg/H	2.8 米/分	1/4 HP	1/200	500	1000	1635	635	1100	1315	150	230	280	430
					1000	1500	2135							
MCC-330	33 kg/H	2.8 米/分	1/4 HP	1/200	500	1000	1635	635	1100	1315	150	330	380	530
					1000	1500	2135							
MCC-430	45 kg/H	2.8 米/分	1/4 HP	1/200	500	1000	1635	635	1100	1315	150	430	480	630
					1000	1500	2135							

For W, L, H part, We could make as customer's specification.

註：1. 特殊寬度W，平行度L，排屑口高度H可依客戶尺寸訂做。

2. 搬運量可因速度提高或磁力加強而加大。

Handle weight(kg/H) will enlarge because of improving the velocity or enhancing the magnetism.



源利電磁工業股份有限公司

彰化縣鹿港鎮彰濱工業區工業西六路23號

UNI MAGNETIC INDUSTRIAL CO., LTD.

NO. 23, GONGYE W. 6TH RD. LUKANG TOWN, CHANGHUA HSIEN 50544, TAIWAN

TEL: (04) 7810900

FAX: +886 - 4 - 7810901

http: //www.unimag.com.tw

E-mail: unicoltd@ms26.hinet.net

090805-1000



ISO 9001
FM 518819